



INGEBOMBA

Tobera "PIROUETTE" / "PIROUETTE" Nozzle / "PIROUETTE"


TECHNICAL DATA

INGEBOMBA PARTNER AUTORIZADO PARA CHILE

Tobera "CALIZ" / "CALIX" Nozzle / Ajutage "COUPE"




Model	WLT 711029		WLT 711520		WLT 712021	
Dimen. WxH	34x147 mm		46x150 mm		57x155 mm	
Millim. Outlet Ø	5 mm		7 mm		7 mm	
Connection	G 1" F		G 1 1/2" F		G 2" F	
Material	Stainless Steel		Stainless Steel		Stainless Steel	
Weight	0,370 Kg.		0,525 Kg.		0,845 Kg.	
Ball Joint	no		no		no	
Water Level	no		no		no	
Diameter / cm.	l/min	m.c.w / Bar	l/min	m.c.w / Bar	l/min	m.c.w / Bar
20	17	0,70 / 0,07	24	0,60 / 0,06	32	0,40 / 0,04
30	26	0,80 / 0,08	33	0,70 / 0,07	48	0,50 / 0,05
40	35	0,90 / 0,09	42	0,80 / 0,08	64	0,60 / 0,06
50	40	1,00 / 0,10	47	0,90 / 0,09	70	0,70 / 0,07
60	43	1,10 / 0,11	51	1,00 / 0,10	75	0,80 / 0,08
70	47	1,20 / 0,12	58	1,10 / 0,11	80	0,90 / 0,09
80	50	1,30 / 0,13	62	1,20 / 0,12	85	1,00 / 0,10
90	53	1,42 / 0,14	65	1,30 / 0,13	91	1,10 / 0,11
100	55	1,55 / 0,15	69	1,40 / 0,14	96	1,20 / 0,12
120					105	1,30 / 0,13
130					111	1,40 / 0,14
140					115	1,50 / 0,15
150					121	1,60 / 0,16

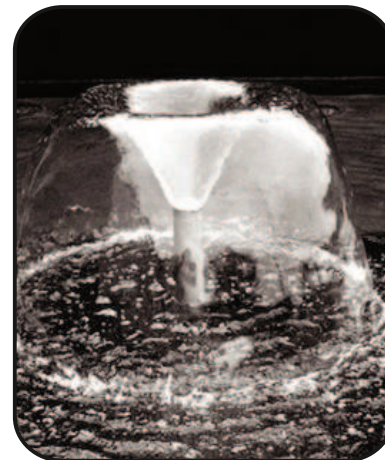

Tobera "PIROUETTE" / "PIROUETTE" Nozzle / Ajutage "PIROUETTE"

Model	PIROUETTE						PIROUETTE + CENTRAL JET					
	WLT 901086	WLT 901587	WLT 902088	WLT 901082	WLT 901583	WLT 902084	WLT 901086	WLT 901587	WLT 902088	WLT 901082	WLT 901583	WLT 902084
Dimen. Wide Ø	382 mm	455 mm	475 mm	382 mm	455 mm	475 mm	382 mm	455 mm	475 mm	382 mm	455 mm	475 mm
Millim. Outlet Ø	8x7 mm	8x8 mm	8x8 mm	4x7 mm + 1x6 mm	4x8 mm + 1x6mm	4x8 mm + 1x6mm	8x7 mm	8x8 mm	8x8 mm	4x7 mm + 1x6 mm	4x8 mm + 1x6mm	4x8 mm + 1x6mm
Connection	G 1" F	G 1 1/2" M	G 2" F	G 1" F	G 1 1/2" M	G 2" F	G 1" F	G 1 1/2" M	G 2" F	G 1" F	G 1 1/2" M	G 2" F
Material	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Weight	1,000 Kg.	1,263 Kg.	1,700 Kg.	0,740 Kg.	0,975 Kg.	1,420 Kg.	1,000 Kg.	1,263 Kg.	1,700 Kg.	0,740 Kg.	0,975 Kg.	1,420 Kg.
Ball Joint	no	no	no	no	no	no	no	no	no	no	no	no
Water Level	no	no	no	no	no	no	no	no	no	no	no	no
Height / m.	l/min	m.c.w / Bar	l/min	m.c.w / Bar	l/min	m.c.w / Bar	l/min	m.c.w / Bar	l/min	m.c.w / Bar	l/min	m.c.w / Bar
0,50	46	0,70 / 0,07	76	0,70 / 0,07	76	0,70 / 0,07	28	0,74 / 0,07	43	0,71 / 0,07	43	0,72 / 0,07
0,75	58	1,00 / 0,10	92	1,00 / 0,10	92	1,00 / 0,10	31	1,10 / 0,11	52	1,05 / 0,10	52	1,06 / 0,10
1,00	66	1,30 / 0,13	101	1,60 / 0,16	101	1,60 / 0,16	36	1,30 / 0,13	58	1,60 / 0,16	58	1,60 / 0,16
1,25	78	1,60 / 0,16	119	1,70 / 0,17	119	1,70 / 0,17	44	1,60 / 0,16	68	1,70 / 0,17	68	1,70 / 0,17
1,50	87	1,90 / 0,19	136	1,80 / 0,18	136	1,80 / 0,18	50	1,90 / 0,19	78	1,80 / 0,18	78	1,80 / 0,18
1,75	97	2,20 / 0,22	150	2,00 / 0,20	150	2,00 / 0,20	56	2,20 / 0,22	86	2,00 / 0,20	86	2,00 / 0,20
2,00	105	2,60 / 0,26	164	2,40 / 0,24	164	2,40 / 0,24	61	2,60 / 0,26	94	2,40 / 0,24	94	2,40 / 0,24
2,50	119	3,30 / 0,33	187	3,20 / 0,32	187	3,20 / 0,32	70	3,30 / 0,33	108	3,20 / 0,32	108	3,20 / 0,32
3,00	133	4,00 / 0,40	209	3,90 / 0,39	209	3,90 / 0,39	78	4,00 / 0,40	120	3,90 / 0,39	120	3,90 / 0,39
3,50			228	4,70 / 0,47	228	4,70 / 0,47			132	4,70 / 0,47	132	4,70 / 0,47
4,00			246	5,40 / 0,54	246	5,40 / 0,54			145	5,40 / 0,54	145	5,40 / 0,54
5,00					282	7,00 / 0,70					167	7,00 / 0,70

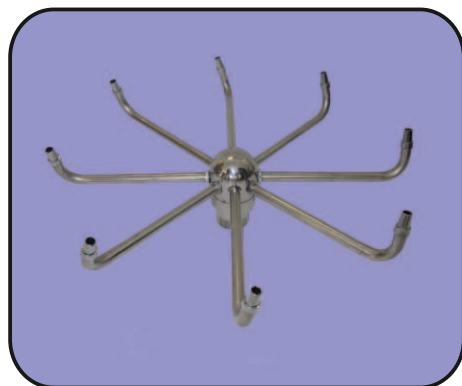

- Toberas para fuentes de alta tecnología, fabricadas en Acero inoxidable AISI-304, no son dependientes del nivel del agua.
- Nozzles for fountains, high technology, made in Stainless steel AISI-304, not water level dependent.
- Ajutages pour fontaines, haute technologie, fabriquées dans Acier inoxydable AISI-304, ne sont pas dépendantes du niveau d'eau.