


SC SERIES PUMP




Highlight Features:

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

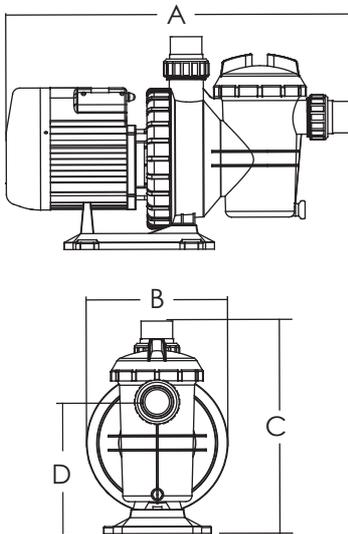

Technical Information

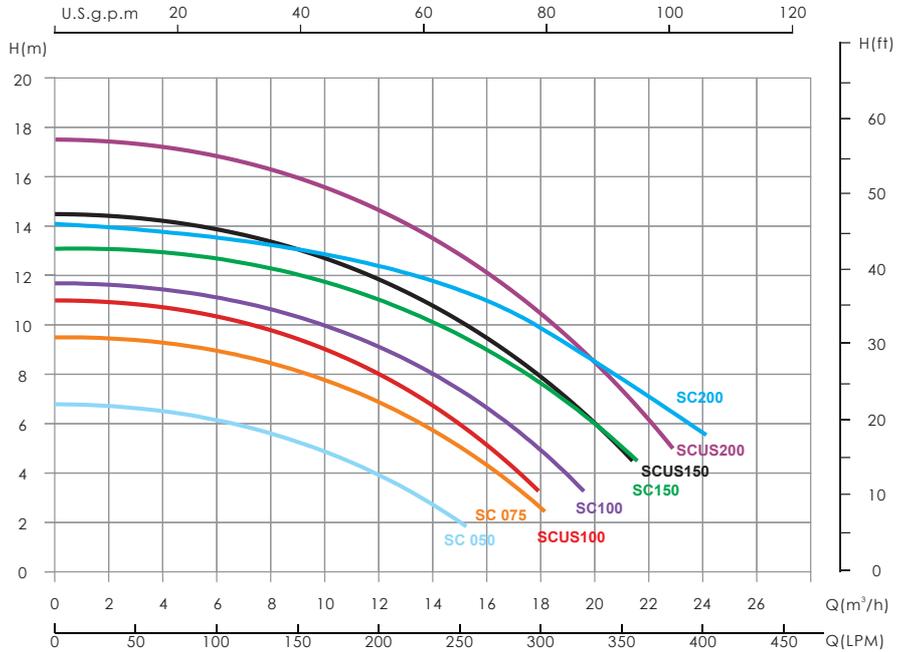

Product Information & Dimension

Code 220V/50Hz	Code 220V/60Hz	Code 230V/115V/60Hz	Model No	Connection Size	Input power	Horsepower
88021703	88021803	/	SC050	1.5 inch 50mm	0.51kW	0.5hp
88021704	88021804	/	SC075	1.5 inch 50mm	0.75kW	0.75hp
88021705	88021805	/	SC100	1.5 inch 50mm	0.97kW	1.0hp
88021707	88021807	/	SC150	1.5 inch 50mm	1.3kW	1.5hp
88021708	88021808	/	SC200	1.5 inch 50mm	1.71kW	2.0hp
/	/	88020605	SCUS100	1.5 inch 50mm	0.97kW	1.0hp
/	/	88020607	SCUS150	1.5 inch 50mm	1.4kW	1.5hp
/	/	88020608	SCUS200	1.5 inch 50mm	1.8kW	2.0hp


Model No	A mm	B mm	C mm	D mm	Capacitance 220V	Capacitance 110V	Capacitance 110V	Weight(kg)
SC050	600	240	370	221	14µF	40µF	/	10.4
SC075	600	240	370	221	20µF	60µF	/	12.1
SC100	600	240	370	221	25µF	90µF	/	13.4
SC150	600	240	370	221	25µF	90µF	/	14.9
SC200	600	240	370	221	30µF	90µF	/	15.4
SC100(B)	610	240	370	221	/	/	90µF	15
SC150(B)	610	240	370	221	/	/	90µF	16
SC200(B)	610	240	370	221	/	/	100µF	17.5

SS SERIES PUMP

“SS” series swimming pool pump is designed for medium head installation in domestic pool and spa pool. 1.5 inch suction and discharge port with transparent lid. It operates at a low decibel and energy consumption which requires minimal maintenance.



Technical Information

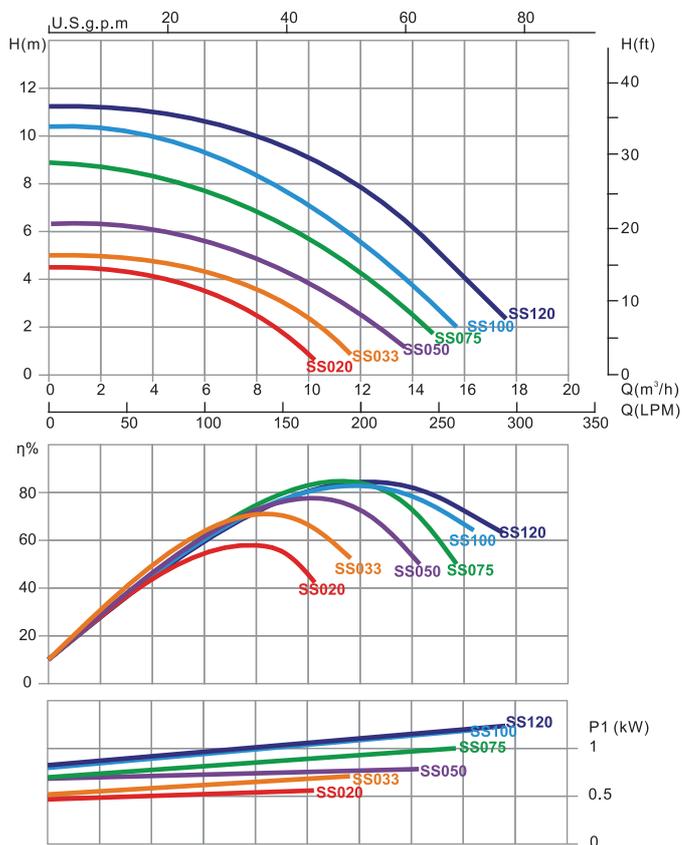

Highlight Features:

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

Product Information & Dimension

Code 220V/50Hz	Code 110V/60Hz	Model No	Connection Size	Input power	Horsepower
88022401	88022601	SS020	1.5 inch 50mm	0.28kW	0.2hp
88022402	88022602	SS033	1.5 inch 50mm	0.43kW	0.33hp
88022403	88022603	SS050	1.5 inch 50mm	0.55kW	0.50hp
88022404	88022604	SS075	1.5 inch 50mm	0.75kW	0.75hp
88022405	88022605	SS100	1.5 inch 50mm	0.90kW	1.0hp
88022406	88022606	SS120	1.5 inch 50mm	0.97kW	1.2hp

Model No	A mm	B mm	C mm	D mm	Capacitance 220V	Capacitance 110V	Weight(kg)
SS020	507	211	340	195	5μF	20μF	6.20
SS033	507	211	340	195	6μF	24μF	6.50
SS050	552	211	340	195	8μF	30μF	8.03
SS075	552	211	340	195	14μF	40μF	9.01
SS100	552	211	340	195	20μF	60μF	9.09
SS120	552	211	340	195	20μF	60μF	11.00

