



Highlight Features:

- Suggested Installation: Domestic In-ground and above ground pool / hot spa tub
- Max operating pressure 28 psi / 2.0 bar
- Max temperature of 40°C (104 °F)
- Universal standard of union connection provided
- Suggested size of media : 0.5-0.8mm

"P" Series Top Mount Filter

FEATURES

Polyethylene tank has been well-received by the industry due to the durability, trustworthy performance and economical reason. With UV-resistant material used, it is able to operate under prolong sunlight for years of reliability. "P" Series (P350-P700) top mount filters are equipped with a six-position, side mount multiport valve and ABS laterals.


Technical Information

Code	Model No	Filter Area(m ²)	Valve Connections		Max Flow Rate		Sand(kg)
88011601	P350	0.10	1.5 inch	50mm	72lpm	4.32m ³ /h	20
88011602	P400	0.13	1.5 inch	50mm	102lpm	6.12m ³ /h	35
88011603	P450	0.16	1.5 inch	50mm	130lpm	7.80m ³ /h	45
88011604	P500	0.22	1.5 inch	50mm	180lpm	10.80m ³ /h	85
88011605	P650	0.31	1.5 inch	50mm	255lpm	15.30m ³ /h	145
88011607	P700	0.39	1.5 inch	50mm	320lpm	19.20m ³ /h	210

Note: Suggested sand weight varies with differences in filter media size. For reference only.

Product Dimension

Model No	A mm	B mm	C mm	D mm	E mm	F mm
P350	726	619	550	160	350	298
P400	757	640	590	175	400	390
P450	814	698	638	210	449	390
P500	845	730	670	235	527	500
P650	950	835	775	300	627	500
P700	1020	905	845	330	703	500

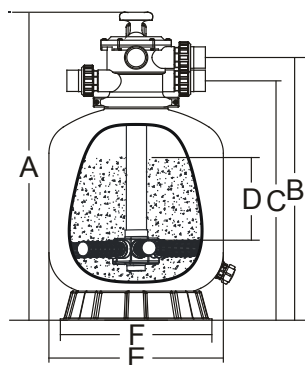

INGEBOMBA

